




Features:

- Low cost JB suitable for low power panels
- 2 terminals, No diode
- IP63 Rated enclosure, Connectors are rated IP67.
- Requires no potting inside the junction box.
- Terminals can be soldered or .
- Compartment between junction box and panel hermetically sealed with potting compound
- Sliding cover

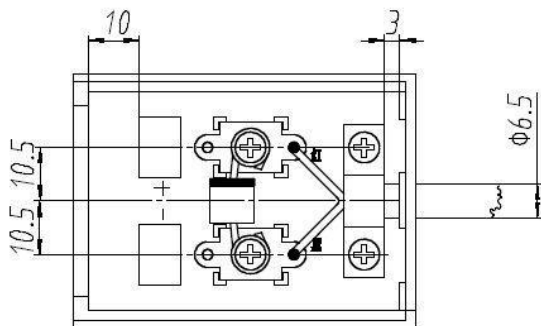

TECHNICAL SPECIFICATIONS

	JH-04 (TUV)
Power	30W
Number of diodes	0
Rated voltage	TUV:1000V
Rated current	3A
Rated current of diode	-
Safety class	Class II
Dimension	67x50xX17mm
Temperature range	-40°C to 85°C
Cross-section area of Cable	2 x 1 sq.mm
Degree of protection	IP63
Flame class	UL94-VO
Length of Cable	0m
Box Material	PPO