




- Features:**
- IP65 Rated enclosure, Connectors are rated IP67.
 - 4-6 terminals, 3-6 diodes
 - Spring clips eliminate the need for soldering foil leads to terminals.
 - Spring clips are encased in plastic housing
 - Junction box is fixed to the solar panel with silicone, creating watertight seal.
 - Junction box lid uses two latches to secure the lid to the lower box housing.
 - TUV certified

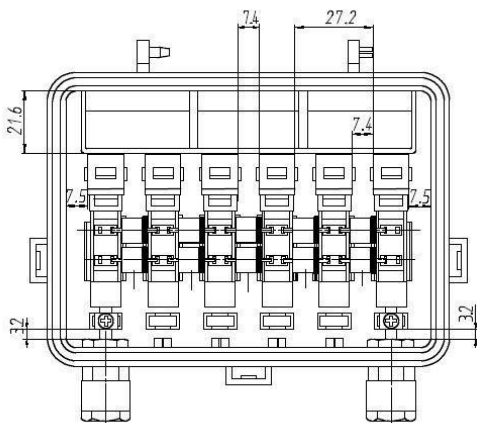

TECHNICAL SPECIFICATIONS (for 6 diode)	
	JH-200A (TUV)
Power	250W
Number of diodes	6 (10SQ050)
Rated voltage	1000V
Rated current	20A
Rated current of diode	10A
Safety class	Class II
Dimension	140x102x28mm
Temperature range	-40°C to 85°C
Cross-section area of Cable	1x6 sq.mm
Degree of protection	IP65
Flame class	UL94-VO
Length of Cable	0.95m
Box Material	PPO